


Datasheet FT-094633

PARFIXC33 : fastening collar for insulated down conductor.

Edition du 10/09/2015

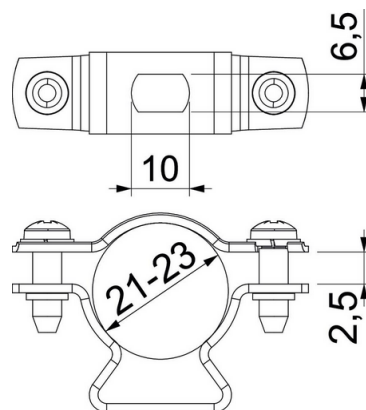

Description

Fastening collar for insulated down conductor PARDES33.

Fastening every 33cm approx. If usage with Defystorm ESE.

Specification

Material : Stainless steel.

Ø ext max of cable : 20-23mm

Weight : 60g/pc

Conforme NF EN 62561-4

Selling info

Box of 50pcs